


支持管 側壁型	黄銅管 (B s t)	管内導線型式																																																																																																												
	<table><tr><th rowspan="2">品 番</th><th rowspan="2">全 長 L (m)</th><th rowspan="2">有効長 h (m)</th><th colspan="2">支持管寸法</th></tr><tr><th colspan="2">L</th></tr><tr><td>5731</td><td>3.5</td><td>2</td><td colspan="2">38φ×3t×3.5m</td></tr><tr><td>5732</td><td>4.5</td><td>3</td><td colspan="2">38φ×3t×4.5m</td></tr></table> 注) ダイヒカップリングは、取付済。	品 番	全 長 L (m)	有効長 h (m)	支持管寸法		L		5731	3.5	2	38φ×3t×3.5m		5732	4.5	3	38φ×3t×4.5m																																																																																													
品 番	全 長 L (m)				有効長 h (m)	支持管寸法																																																																																																								
		L																																																																																																												
5731	3.5	2	38φ×3t×3.5m																																																																																																											
5732	4.5	3	38φ×3t×4.5m																																																																																																											
支持管 側壁型	ステンレス管 (S U S 3 0 4)	管体導線型式																																																																																																												
	<table><tr><th rowspan="2">品 番</th><th rowspan="2">全 長 L (m)</th><th rowspan="2">有効長 h (m)</th><th colspan="2">支持 管 寸 法</th></tr><tr><th colspan="2">L</th></tr><tr><td>5781</td><td>4</td><td>2.5</td><td colspan="2">48.6φ×3t×4m</td></tr></table> 注) ダイヒカップリング及び支持管用接続端子は、取付済。	品 番	全 長 L (m)	有効長 h (m)	支持 管 寸 法		L		5781	4	2.5	48.6φ×3t×4m																																																																																																		
品 番	全 長 L (m)				有効長 h (m)	支持 管 寸 法																																																																																																								
		L																																																																																																												
5781	4	2.5	48.6φ×3t×4m																																																																																																											
支持管 側壁型	ステンレス管 (S U S 3 0 4)	管体導線型式																																																																																																												
	<table><tr><th rowspan="2">品 番</th><th rowspan="2">全 長 L (m)</th><th rowspan="2">有効長 h (m)</th><th colspan="3">支持 管 寸 法</th></tr><tr><th>L₁</th><th>L₂</th><th>d</th></tr><tr><td>5771</td><td>4.5</td><td>3</td><td>60.5φ×3t×4m</td><td>48.6φ×3t×0.5m</td><td>M10</td></tr><tr><td>5772</td><td>5.5</td><td>4</td><td>〃</td><td>48.6φ×3t×1.5m</td><td>〃</td></tr><tr><td>5773</td><td>6.5</td><td>5</td><td>76.3φ×3t×4m</td><td>48.6φ×3t×2.5m</td><td>〃</td></tr><tr><td>5774</td><td>7.5</td><td>6</td><td>〃</td><td>48.6φ×3t×3.5m</td><td>〃</td></tr><tr><td>5775</td><td>〃</td><td>〃</td><td>89.1φ×3t×4m</td><td>60.5φ×3t×3.5m</td><td>〃</td></tr><tr><td>5776</td><td>〃</td><td>〃</td><td>89.1φ×4t×5.5m</td><td>60.5φ×3t×2m</td><td>〃</td></tr><tr><td>5777</td><td>8.5</td><td>7</td><td>〃</td><td>60.5φ×3t×3m</td><td>〃</td></tr><tr><td>5778</td><td>〃</td><td>〃</td><td>101.6φ×4t×5.5m</td><td>〃</td><td>M12</td></tr><tr><td>5779</td><td>10</td><td>8</td><td>〃</td><td>60.5φ×3t×4.5m</td><td>〃</td></tr><tr><td>5780</td><td>〃</td><td>〃</td><td>114.3φ×6t×5.5m</td><td>76.3φ×3t×4.5m</td><td>〃</td></tr></table> 注) ダイヒカップリング及び支持管用接続端子は、取付済。 <table><tr><th rowspan="2">品 番</th><th rowspan="2">全 長 L (m)</th><th rowspan="2">有効長 h (m)</th><th colspan="3">支持 管 寸 法</th></tr><tr><th>L₁</th><th>L₂</th><th>d</th></tr><tr><td>5782</td><td>5</td><td>3</td><td>60.5φ×3t×4m</td><td>48.6φ×3t×1m</td><td>M10</td></tr><tr><td>5783</td><td>6</td><td>4</td><td>〃</td><td>48.6φ×3t×2m</td><td>〃</td></tr><tr><td>5784</td><td>〃</td><td>〃</td><td>76.3φ×3t×4m</td><td>〃</td><td>〃</td></tr><tr><td>5785</td><td>7</td><td>5</td><td>〃</td><td>48.6φ×3t×3m</td><td>〃</td></tr><tr><td>5786</td><td>〃</td><td>〃</td><td>89.1φ×3t×4m</td><td>〃</td><td>〃</td></tr></table> 注) ダイヒカップリング及び支持管用接続端子は、取付済。	品 番	全 長 L (m)	有効長 h (m)	支持 管 寸 法			L ₁	L ₂	d	5771	4.5	3	60.5φ×3t×4m	48.6φ×3t×0.5m	M10	5772	5.5	4	〃	48.6φ×3t×1.5m	〃	5773	6.5	5	76.3φ×3t×4m	48.6φ×3t×2.5m	〃	5774	7.5	6	〃	48.6φ×3t×3.5m	〃	5775	〃	〃	89.1φ×3t×4m	60.5φ×3t×3.5m	〃	5776	〃	〃	89.1φ×4t×5.5m	60.5φ×3t×2m	〃	5777	8.5	7	〃	60.5φ×3t×3m	〃	5778	〃	〃	101.6φ×4t×5.5m	〃	M12	5779	10	8	〃	60.5φ×3t×4.5m	〃	5780	〃	〃	114.3φ×6t×5.5m	76.3φ×3t×4.5m	〃	品 番	全 長 L (m)	有効長 h (m)	支持 管 寸 法			L ₁	L ₂	d	5782	5	3	60.5φ×3t×4m	48.6φ×3t×1m	M10	5783	6	4	〃	48.6φ×3t×2m	〃	5784	〃	〃	76.3φ×3t×4m	〃	〃	5785	7	5	〃	48.6φ×3t×3m	〃	5786	〃	〃	89.1φ×3t×4m	〃	〃	
品 番	全 長 L (m)				有効長 h (m)	支持 管 寸 法																																																																																																								
		L ₁	L ₂	d																																																																																																										
5771	4.5	3	60.5φ×3t×4m	48.6φ×3t×0.5m	M10																																																																																																									
5772	5.5	4	〃	48.6φ×3t×1.5m	〃																																																																																																									
5773	6.5	5	76.3φ×3t×4m	48.6φ×3t×2.5m	〃																																																																																																									
5774	7.5	6	〃	48.6φ×3t×3.5m	〃																																																																																																									
5775	〃	〃	89.1φ×3t×4m	60.5φ×3t×3.5m	〃																																																																																																									
5776	〃	〃	89.1φ×4t×5.5m	60.5φ×3t×2m	〃																																																																																																									
5777	8.5	7	〃	60.5φ×3t×3m	〃																																																																																																									
5778	〃	〃	101.6φ×4t×5.5m	〃	M12																																																																																																									
5779	10	8	〃	60.5φ×3t×4.5m	〃																																																																																																									
5780	〃	〃	114.3φ×6t×5.5m	76.3φ×3t×4.5m	〃																																																																																																									
品 番	全 長 L (m)	有効長 h (m)	支持 管 寸 法																																																																																																											
			L ₁	L ₂	d																																																																																																									
5782	5	3	60.5φ×3t×4m	48.6φ×3t×1m	M10																																																																																																									
5783	6	4	〃	48.6φ×3t×2m	〃																																																																																																									
5784	〃	〃	76.3φ×3t×4m	〃	〃																																																																																																									
5785	7	5	〃	48.6φ×3t×3m	〃																																																																																																									
5786	〃	〃	89.1φ×3t×4m	〃	〃																																																																																																									

支持管 自立型

ステンレス管 (SUS304)

管体導線型式

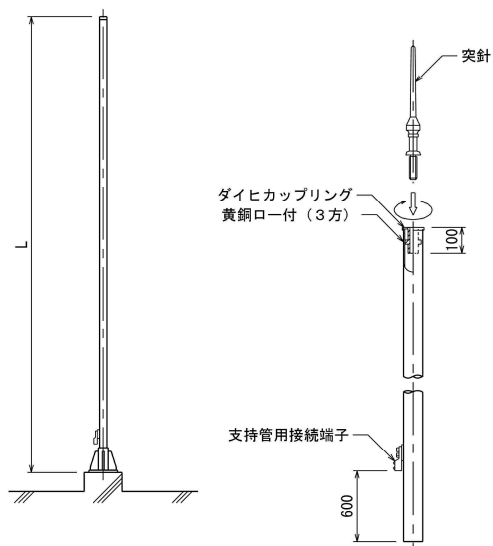


品 番	全 長 L (m)	支持管 寸 法
		L
5791	3	48.6φ×3t×3m
5792	4	48.6φ×3t×4m
5793	//	60.5φ×3t×4m

注) ダイヒカップリング及び支持管用接続端子は、取付済。

支持管 自立型

ステンレス管 (SUS304)

管体導線型式

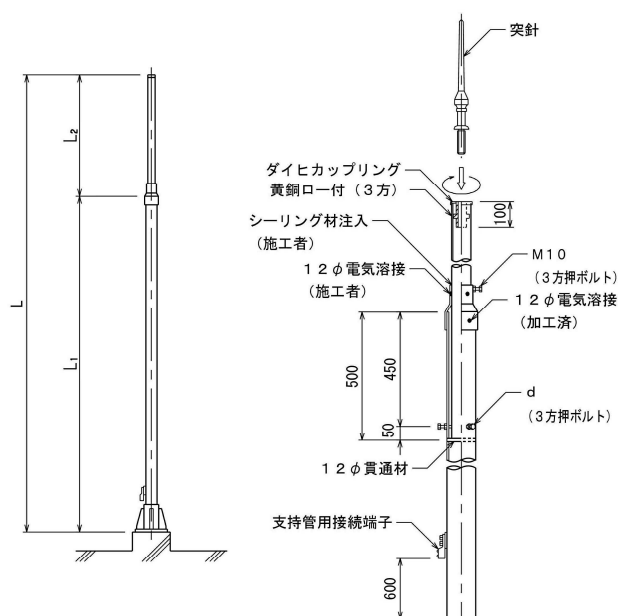

品 番	全 長 L (m)	支持管 寸 法		
		L ₁	L ₂	d
5794	5	76.3φ×3t×4m	48.6φ×3t×1m	M10
5795	6	//	48.6φ×3t×2m	//
5796	//	89.1φ×3t×4m	60.5φ×3t×2m	//
5797	//	101.6φ×3t×4m	//	M12
5798	7	//	60.5φ×3t×3m	//
5799	//	101.6φ×4t×4m	//	//
5800	8	101.6φ×4t×5.5m	60.5φ×3t×2.5m	//
5801	//	114.3φ×4t×5.5m	76.3φ×3t×2.5m	//
5802	//	114.3φ×6t×5.5m	//	//

注) ダイヒカップリング及び支持管用接続端子は、取付済。